

**JAMEC PEM**

# **POWER CABLE REEL RETRACTABLE**



## **OPERATING INSTRUCTIONS**

**PART NO: 130.078 POWER CABLE REEL - 15A 3600 W- RETRACTABLE 18 M**

**PART NO: 130.089 POWER CABLE REEL - 10A 2400 W - RETRACTABLE 18 M**

## 130.078 POWER CABLE REEL & 130.089 POWER CABLE REEL RETRACTABLE

Combining safety with accessibility, these compact, high-vis cable reels feature an extension cable allowing you to use a device up to 18 metres away from the reel and original power source. The internal brush system allows reel retraction without disconnecting the device, enabling you to relocate and adjust positioning with ease. This heavy-duty reel can be used indoor and outdoor making it an ideal choice for use around the home, caravan/campsite, workshop or industrial work site.

### FEATURES

- High visibility orange colour case and cable
- Thermal cut off switch
- Wall mountable with included wall mount bracket
- Heavy duty electrical cable for industrial and outdoor applications
- Illuminated on / off button
- Compact flat design for easy storage
- Brush system on board so there's no need to disconnect power outlets while retracting cable
- Anti-slip rubber mounts
- Retraction lock off switch
- Adjustable cable stop
- Can be wall mounted or used on the ground

### SPECIFICATIONS


|                                       |  |         |
|---------------------------------------|--|---------|
| <b>Part No.</b>                       | 130.078                                  | 130.089 |
| <b>Cable length</b>                   | 18 m                                     |         |
| <b>Description</b>                    | Cable reel                               |         |
| <b>Cable</b>                          | 1.5 mm <sup>2</sup> Heavy duty core flex |         |
| <b>AMP</b>                            | 15A                                      | 10A     |
| <b>Voltage</b>                        | 240V                                     |         |
| <b>Wattage (total load)</b>           | 3600 W                                   | 2600 W  |
| <b>Input</b>                          | Male                                     |         |
| <b>Output</b>                         | Female (retracting end)                  |         |
| <b>IP rating</b>                      | IP20                                     |         |
| <b>On / off switch</b>                | Yes                                      |         |
| <b>Thermal protector reset switch</b> | Yes                                      |         |
| <b>Current overload switch</b>        | Yes                                      |         |
| <b>Certification</b>                  | AS/NZ 3105                               |         |
| <b>Weight</b>                         | 6.90 kg                                  |         |
| <b>Product dimensions</b>             | 350 L x 185 W x 370 D mm                 |         |
| <b>Advised application</b>            | Electric mains power                     |         |

### IMPORTANT

Read and save these instructions. Read through this owner's manual carefully before using product. Protect yourself and others by observing all safety information, warnings, and cautions. Failure to comply with instructions could result in personal injury and/or damage to product or property. Please retain instructions for future reference.

## PRODUCT IDENTIFICATION

1. Overload switch
2. On / off switch illuminated
3. Rubber feet
4. Cable stop
5. Cable reel retract lock
6. Thermal switch
7. 18 m output cable with female socket
8. 0.9 m input cable with male plug

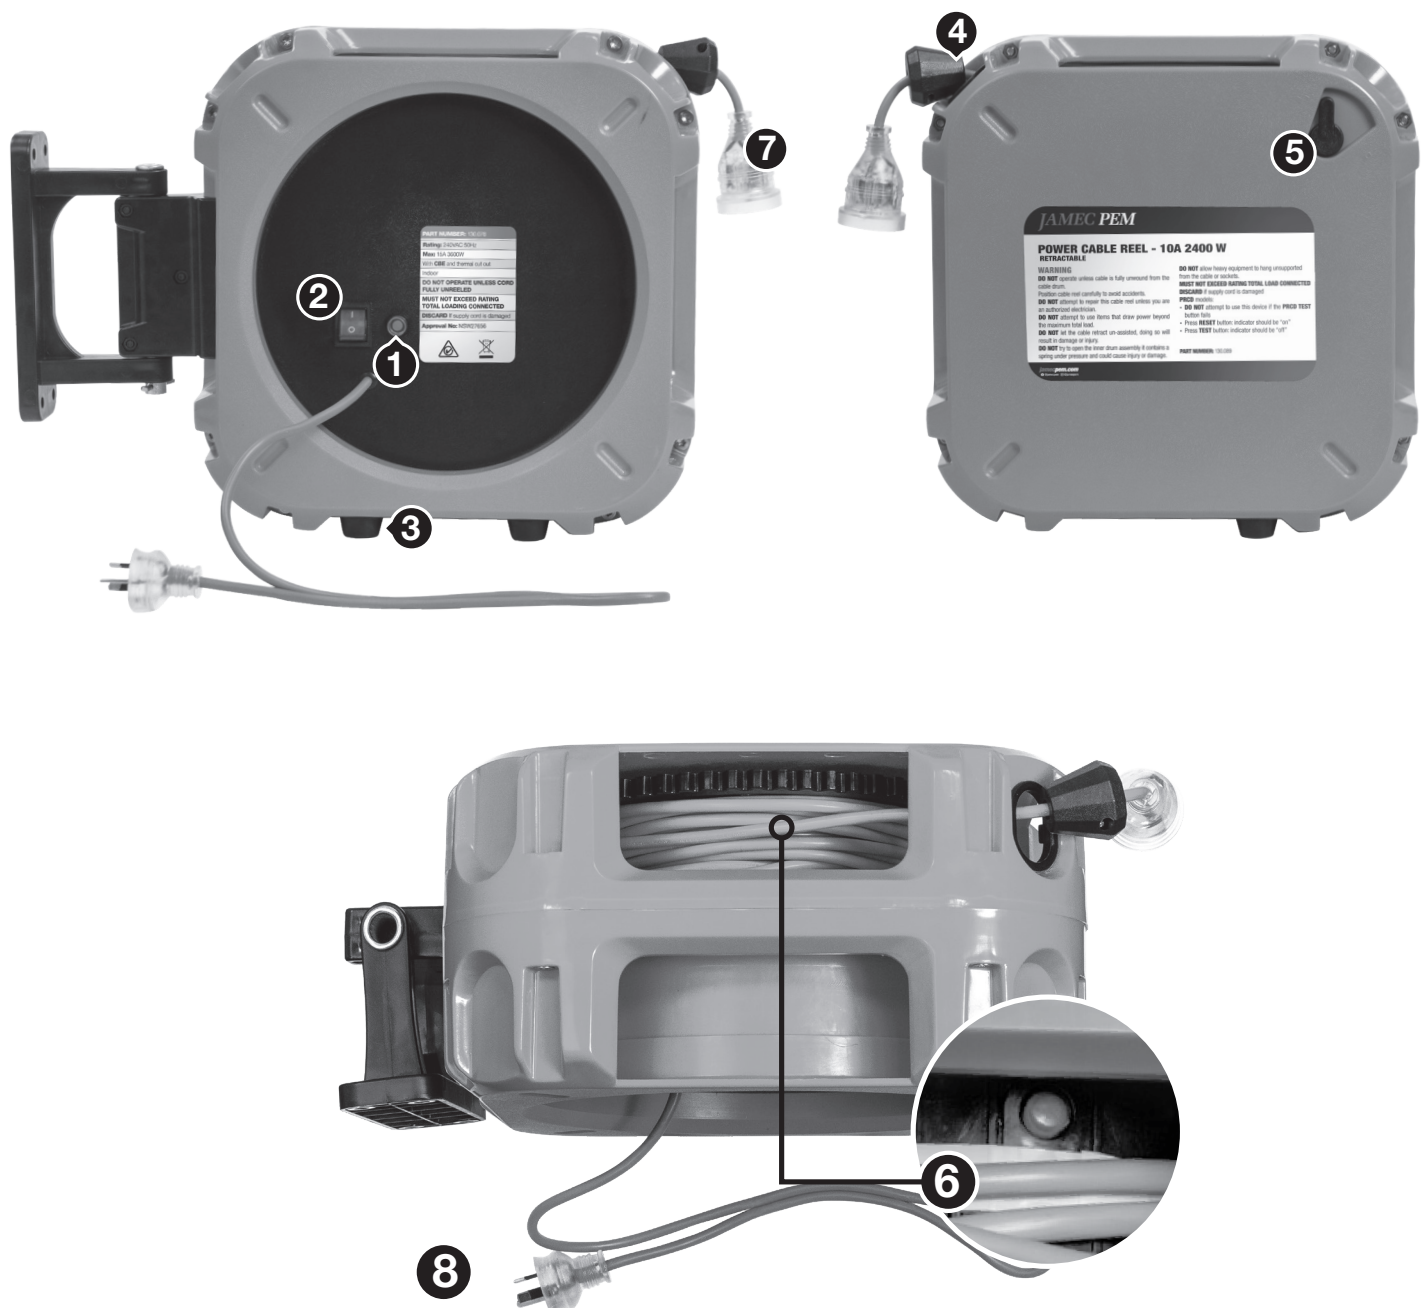

# JAMEC PEM

## OPERATION

The 130.078 and 130.089 models are designed as a portable extension lead, with mains power needed after the cable has been extracted.

## EXTRACTING THE CABLE

Ensure the 'POWER' switch is in the 'OFF' position. Holding with one hand, slowly pull the cable ensuring it locks into position each time before pulling the next length. The lock position is easily recognised by a clicking noise. Alternatively, the cable reel can be placed on the ground on its rubber feet. To extract whilst the reel is on the ground, place one foot on the reel while using both hands to extract the cable, also ensuring that the cable locks into position as each length is pulled.

**DO NOT retract the cable past the first warning sticker displayed on the cable.**

**The warranty is voided if the internal drum sticker is broken. This sticker confirms extension of the cable reel past the yellow warning marker, indicating a failure to adhere to posted instructions.**

Once all cable is retracted, place the male plug into mains power, the appliance being used into the female plug of the reel and switch the 'POWER' to the 'ON' position.

## RETRACTING THE CABLE

Pull the cable slightly past the last clicking noise, then let the cable slowly retract. DO NOT allow the cable to retract unassisted, as this may cause damage to the cable or injury to the user.

## USING THE RETRACT LOCK OFF

The retract lock off ensures the cable will not retract while work is being conducted. To use the retract lock off, simply push the retract lock off switch into position. To disengage, simply retract the cable as per normal.

## MAINTENANCE

This cable reel is not designed to be serviced however regular inspection of the cable and case is necessary to ensure the device works as intended. Do not try and repair this device unless you are an accredited electrician. This device use mains current and is high voltage.

## WARNING

- DO NOT operate unless cable is fully unwound from the cable drum.
- Position cable reel carefully to avoid accidents.
- DO NOT attempt to repair this cable reel unless you are an authorized electrician.
- DO NOT attempt to use items that draw power beyond the maximum total load.
- DO NOT let the cable retract un-assisted, doing so may result in damage or injury.
- DO NOT try to open the inner drum assembly. It contains a spring under pressure and may cause injury or damage.
- DO NOT allow heavy equipment to hang unsupported from the cable or sockets.
- MUST NOT EXCEED RATING TOTAL LOAD CONNECTED.
- DO NOT USE if supply cord is damaged.

## WARRANTY & CLAIM PROCEDURE

The Jamec Pem Cable Reel is covered against defects in material and workmanship.

In the instance of a warranty claim, the owner will be entitled to a replacement unit or a sufficient repair of the defective part/s and or component/s to ensure normal operating condition of the cable reel.

To register a warranty claim contact:

TradePem Industrial Pty Ltd

Phone: 1300 555 197

Fax: 1300 555 198

E-mail: [enquiries@adventureoperations.com](mailto:enquiries@adventureoperations.com)

**JAMEC PEM**

Distributed by

**TRADEPEM INDUSTRIAL PTY LTD.**